

# Drilling instruction for security rose ESR500/ ESR 550Q Vers. 01- 23.01.2017


**KARCHER**  
**—DESIGN**

Karcher GmbH  
Design-Beschläge  
Raiffeisenstr.32  
74906 Bad Rappenau  
+49-7264-91640  
+49-7264-916440  
mail@karcher-design.de  
www.karcher-design.de

1



2

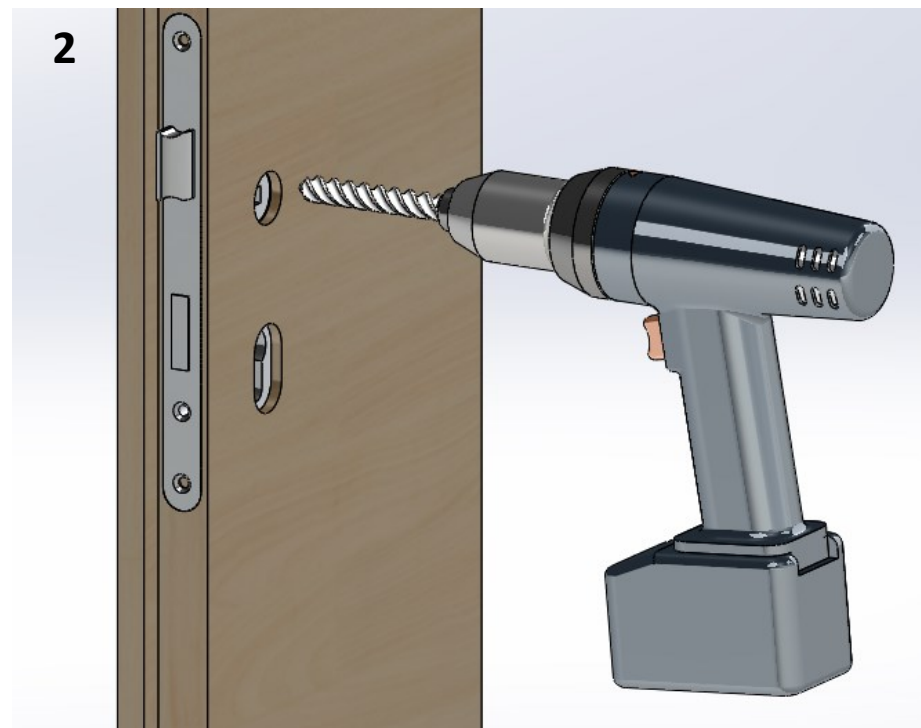


**Bore diameter 12mm**

# Mounting instruction security rose ESR500/ ESR550Q Vers. 01- 23.01.2017

**KARCHER**  
**—DESIGN**

Karcher GmbH  
Design-Beschläge  
Raiffeisenstr.32  
74906 Bad Rappenau  
+49-7264-91640  
+49-7264-916440  
mail@karcher-design.de  
www.karcher-design.de

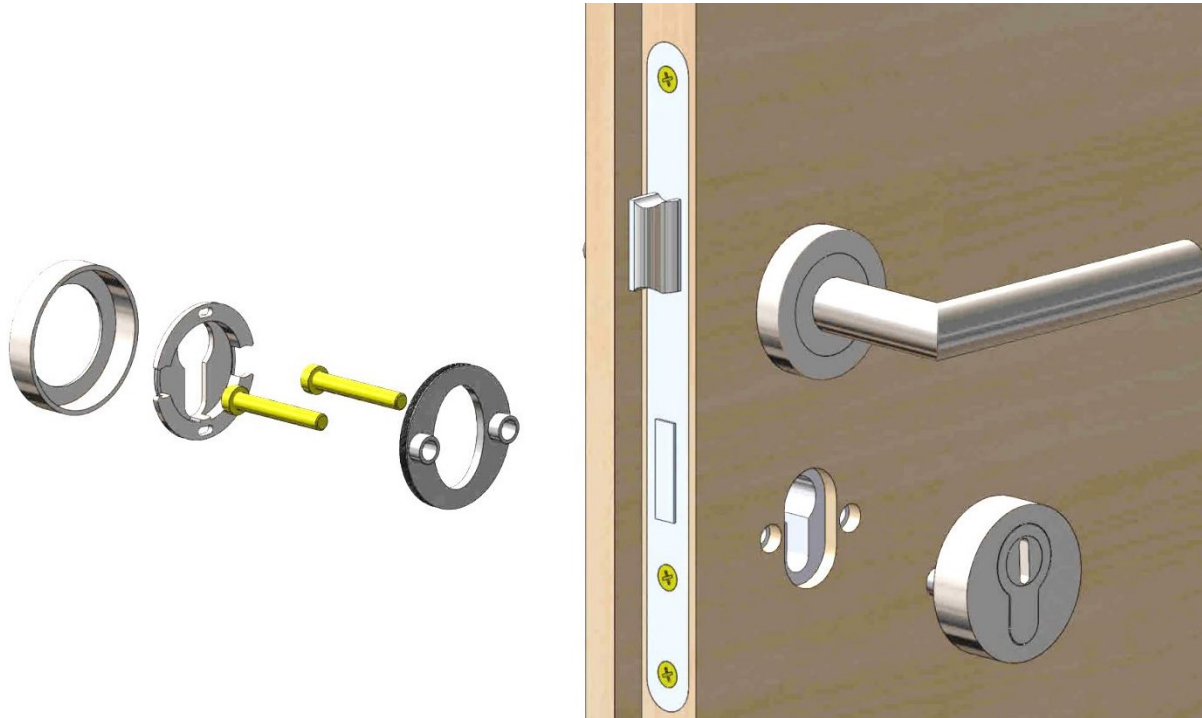

| doorthickness | Required screw size<br>and screw length<br>acc. ISO 4762 |
|---------------|----------------------------------------------------------|
| 35 - 40       | 2x M6 x 45mm                                             |
| 41 - 45       | 2x M6 x 50mm                                             |
| 46 - 50       | 2x M6 x 55mm                                             |
| 51 - 55       | 2x M6 x 60mm                                             |
| 56 - 60       | 2x M6 x 65mm                                             |
| 61 - 65       | 2x M6 x 70mm                                             |
| 66 - 70       | 2x M6 x 75mm                                             |
| 71 - 75       | 2x M6 x 80mm                                             |
| 76 - 80       | 2x M6 x 85mm                                             |
| 81 - 85       | 2x M6 x 90mm                                             |
| 86 - 90       | 2x M6 x 95mm                                             |